




Dimensions



Accessories

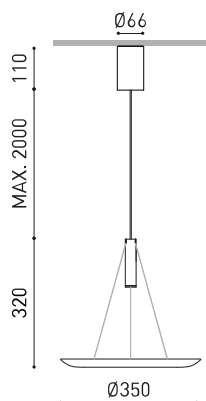

CORD ACCESSORY

PRODUCT

| | |
|----------------|------------------------------------------------|
| Name | TRAY 35 BASE 2M DIM DALI 2700K NT |
| Reference | A5611020NT |
| Colour | Textured black - Other colours, please consult |
| Base Finishing | Textured black |
| RAL | 9005 |
| Category | SUSPENSION |

LIGHT SOURCE

| | |
|-------------------------|----------------------------------|
| Type | LED |
| Gross luminous flux | 350 lm |
| Colour temperature | 2700 K - Other K, please consult |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI>90 |
| Power | 3,3 W |
| Current | 300 mA |
| Efficacy | 106 lm/W |
| LED lifespan | L90B10 > 108.000h |
| Energy efficiency class | F |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|---------------------|----------------------|
| Lighting efficiency | 74% |
| Light beam angle | Up: 121° - Down: 29° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|-----------------------------|----------------------------------|
| Driver | Included |
| Power values of the system | 4,64 W |
| Frequency | 50/60 Hz |
| Dimming | DALI - Other DIM, please consult |
| Electrical insulation class | □ |

OTHER DATA

| | |
|---------------------------|--------------------|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Cord length | Max. 2 m |
| Fast adjustment tensioner | No |
| Weight | 1055 g |
| Packaged weight | 1495 g |
| Packaging dimensions | 439 x 384 x 127 mm |
| Units per package | 1 |
| Materials | Aluminium |




Tray Tray is conceived as an offering to light: a subtle suspended tray that embraces and delicately projects it. This precise exercise in proportions balances vertical and horizontal planes, resulting in a timeless icon. Its sculptural yet light presence floats naturally within domestic and contract spaces. Designed by Víctor Carrasco, Tray stands out for its refined geometry and serene character, becoming a focal point without being intrusive. Particularly suited to lounge areas or singular spaces, it combines a concentrated light beam with indirect lighting.

Polar diagram



Conical diagram

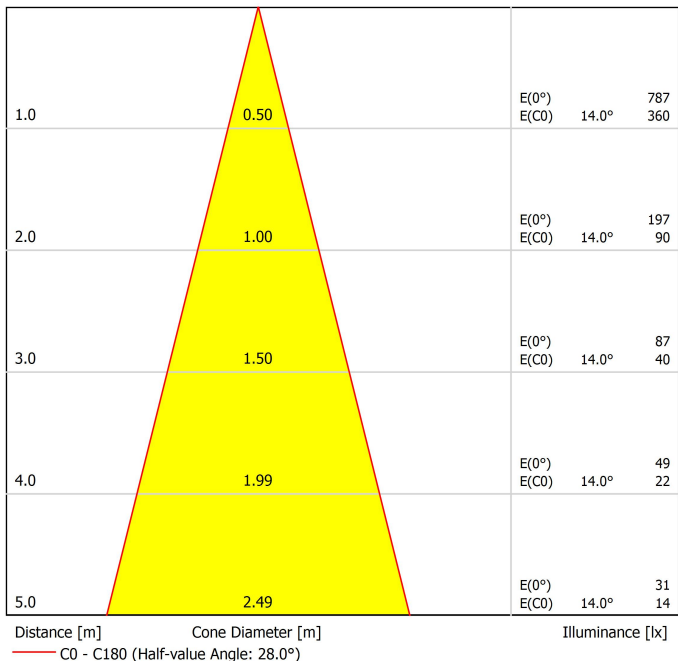



| | |
|-----------|-------------------------------------------------------------------------------------|
| Model | Cord Accessory |
| Reference | 0223-00-00 W N |
| Colour | W <input type="checkbox"/> RAL 9016 N <input checked="" type="checkbox"/> RAL9005 |
| Category | Accessories |

PRODUCT

Dimmensional drawing





Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

