




Dimensions



Accessories

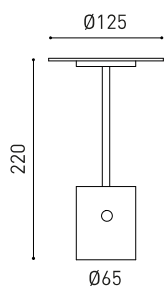

USB CHARGER (EXCLUDED)

Awards



reddot winner 2022
best of the best



PRODUCT

Name	YORU 2700K PG
Reference	A4560000PG
Color	Textured Pebble Grey
RAL	7032
Category	TABLE & FLOOR

LIGHT SOURCE

Type	LED
Gross luminous flux	400 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	2,6 W
Efficacy	154 lm/W
LED lifespan	L90B10 >60.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	84%
Light beam angle	100°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	- USB-C Cable Included
Dimming	3-STEP DIMMING 100% - 50% - 10% - 0% (Switch off)
Battery charging time	5 hours
Electrical insulation class	II


OTHER DATA

Sealing	IP20
Weight	460 g
Packaged weight	1070 g
Packaging dimensions	238 x 141 x 132 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Our ideal portable lamp for terraces offers three intensities to illuminate. A practical and resistant lamp thanks to its solid body made of aluminum. Its timeless and functional design makes Yoru the perfect companion in any type of environment.

Polar diagram

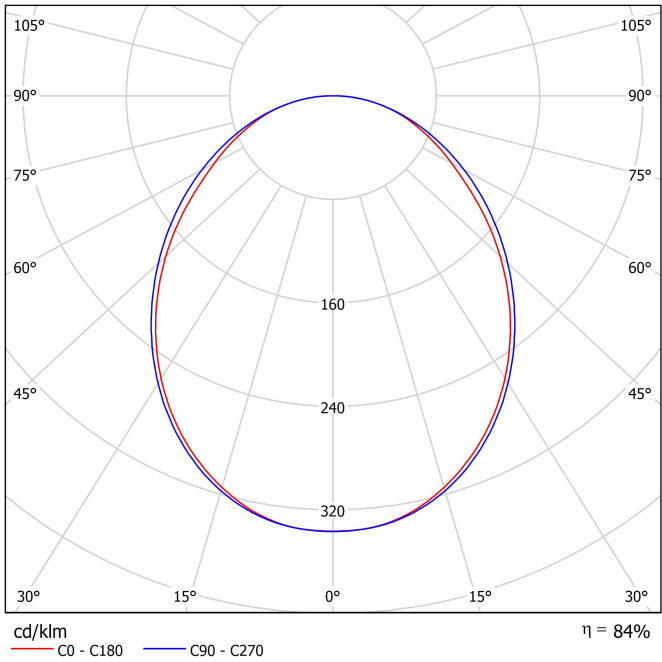

Conical diagram

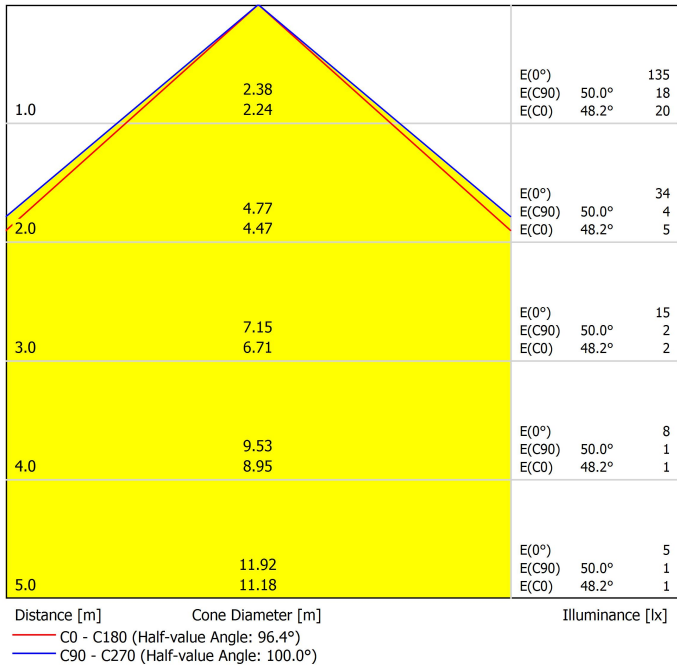




ACCESORIES*

0434-01-65	Universal USB Charger (5V - 1.5A)
------------	-----------------------------------

*Excluded



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:


Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

