




## Dimensions



## Accessories

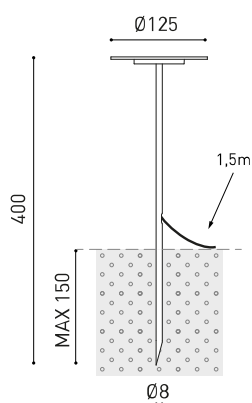

DRIVER OPTIONS



CONNECTOR IP67

## PRODUCT

Name	YORU SPIKE 24V 2700K 40CM NT
Reference	A4751000NT
Color	Textured black
RAL	9005
Category	OUTDOOR

## LIGHT SOURCE

Type	LED
Gross luminous flux	400 lm
Colour temperature	2700 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	3 W
Efficacy	133 lm/W
LED lifespan	L80B10 >60.000h
Energy efficiency class	E

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	84%
Light beam angle	100°

## LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Excluded
Dimming	Please Consult
Electrical insulation class	II


## OTHER DATA

Sealing	IP65
Outdoor Use	Yes
Weight	250 g
Packaged weight	527 g
Packaging dimensions	552 x 147 x 147 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Polycarbonate




Yoru's presence is ethereal and sinuous, almost sculptural. Its warm and perfectly expressed light makes everything around it more genuine and deeper. Now its design goes outdoors with a waterproof version designed to bloom as ambient light points in the garden, composing water lily silhouettes at two different heights.


Polar diagram

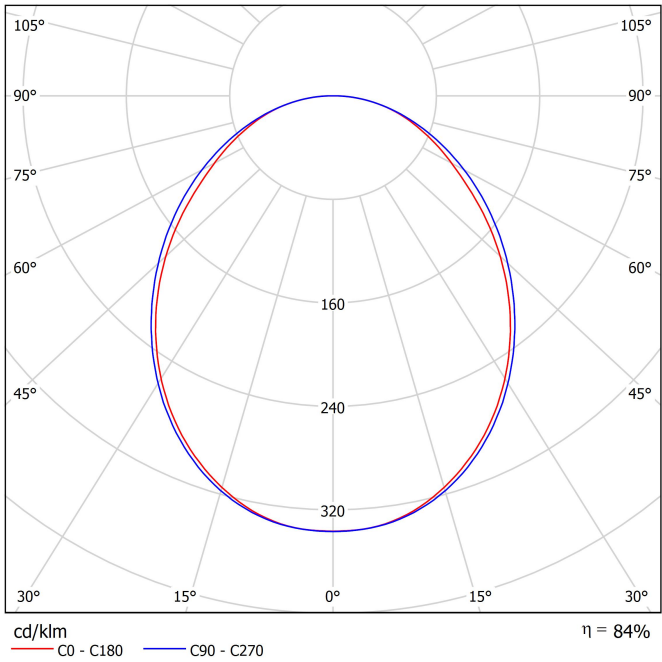



Conical diagram

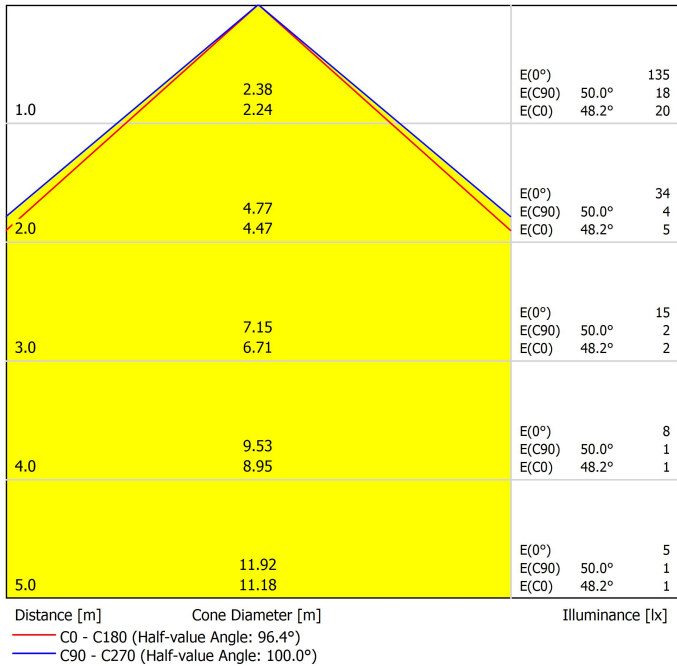





			P	V	D (A x B x C)
24V Power Supply		0434-01-37	60W	24V	180 x 52 x 30mm
		0433-10-22	100W	24V	295 x 43 x 30mm
220 240 V~	IP20	Driver must be placed on remote			



24V Remote Constant Voltage Dimmer			0433-01-32	DALI / Push	181 x 42 x 20mm
			0433-01-35	CASAMBI	72,6 x 30 x 18mm
			0434-01-64	WIFI	105 x 44 x 23mm
24V	IP20	Dimmer must be placed on remote			




DROP VOLTAGE TABLE		CABLE LENGTH (m)			
POWER (W)	CABLE SECTION (mm²)	<25	<50	<75	<100
60	0,75	✓	✓	X	X
	1,5	✓	✓	✓	✓
100	0,75	✓	X	X	X
	0,75	✓	✓	✓	X

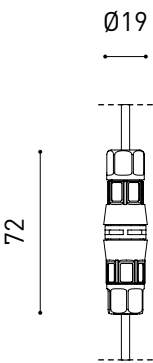

PRODUCT	
Model	Connector IP67
Reference	0434-01-67-   N
Category	Accessories

For cable Ø3,5-7,5mm, section ≤1,5mm²

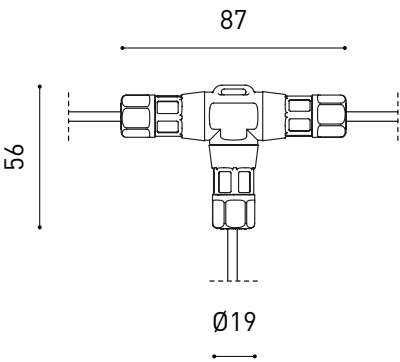

PRODUCT	
Model	Connector IP67 T-Shape
Reference	0434-01-68-   N
Category	Accessories

For cable Ø3,5-7,5mm, section ≤1,5mm²



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

