




Dimensions

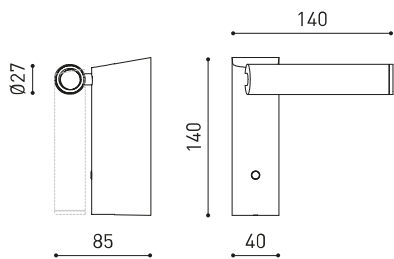

PRODUCT

| | |
|-----------|----------------|
| Name | ENSO 2700K WT |
| Reference | A5720000WT |
| Colour | Textured white |
| RAL | 9016 |
| Category | WALL |

LIGHT SOURCE

| | |
|-------------------------|-------------------|
| Type | LED |
| Gross luminous flux | 190 lm |
| Colour temperature | 2700 K |
| Chromatic stability | MacAdam Step 2 |
| Colour Rendering Index | CRI>90 |
| Power | 2,1 W |
| Current | 150 mA |
| Efficacy | 90 lm/W |
| LED lifespan | L90B10 > 108.000h |
| Energy efficiency class | F |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|---------------------|-----|
| Lighting efficiency | 84% |
| Light beam angle | 16° |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|-----------------------------|----------|
| Driver | Included |
| Power values of the system | 2,82 W |
| Frequency | 50/60 Hz |
| Dimming | No Dim |
| Electrical insulation class | □ |


OTHER DATA

| | |
|----------------------|---------------------------|
| Sealing | IP20 |
| Swivel angle | 90° |
| Rotation angle | 360° |
| Weight | 380 g |
| Packaged weight | 455 g |
| Packaging dimensions | 185 x 99 x 90 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |




Designed by Mario Ruiz (National Design Award 2016), Enso joins the collection as a bedside luminaire, providing focused and comfortable lighting for reading in bedrooms and rest areas. With discreet lighting along its vertical axis and directed light that avoids glare, it combines function and form to integrate harmoniously into the space. With a monolithic silhouette and a distinctive beveled profile, Enso is available in two installation modes: recessed or semi-recessed. Its light source can rotate 360°, while the 2700K color temperature prioritizes warmth and relaxation.

Polar diagram

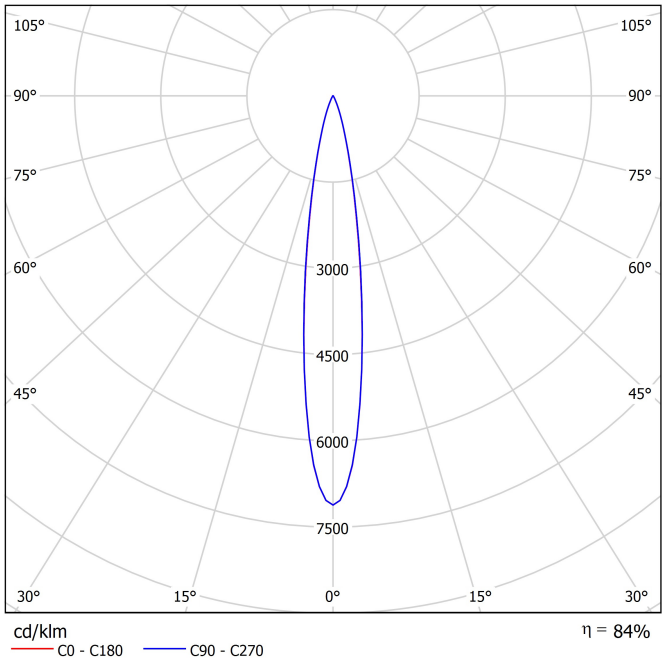

Conical diagram

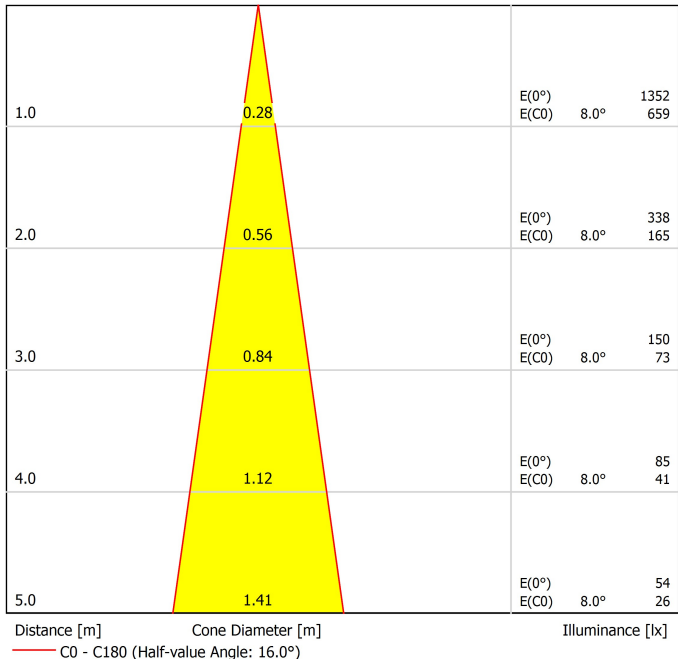



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

