




### Dimensions



### Accessories



HIGH CHROMATIC LED

### Awards



### PRODUCT

Name	LEX MINI 1 4000K G
Reference	A3780112G
Colour	Gold
RAL	1036
Category	CEILING RECESSED

### LIGHT SOURCE

Type	LED
Gross luminous flux	960 lm
Colour temperature	4000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	6,5 W
Current	200 mA
Efficacy	148 lm/W
LED lifespan	L90B10 >55.000h
Energy efficiency class	E

### LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	67%
Light beam angle	70°

### LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included
Power values of the system	7,67 W
Frequency	50/60 Hz
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	□


### OTHER DATA

Sealing	IP20
Wireless control	Please Consult
Emergency power supply	Please Consult
Recess measurements	Ø105 mm
Weight	290 g
Packaged weight	435 g
Packaging dimensions	194 x 163 x 119 mm
Units per package	1
Materials	Aluminium / Polycarbonate




Lex Mini is the smaller version of Lex. Like its big brother, it offers high visual comfort thanks to the double setback of its LED which is located further back in the luminaire, and housed, too, at the end of a second screen. Its mini size is coherent with its proportions, harmonious in relation to its power and flux.

Polar diagram

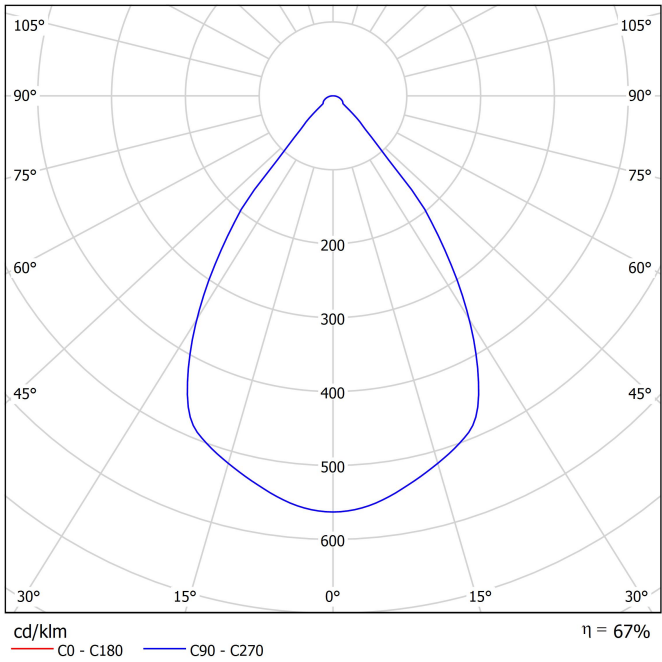

Conical diagram

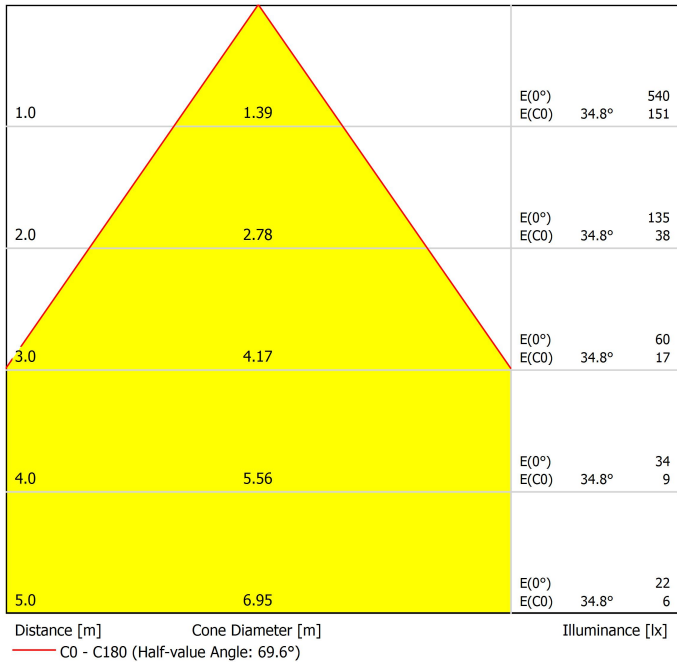

UGR

Glare Evaluation According to UGR														
p Ceiling		70	70	50	50	30	70	70	50	50	30			
p Walls		50	30	50	30	30	50	30	50	30	30			
p Floor		20	20	20	20	20	20	20	20	20	20			
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis							
2H	2H	9.8	10.6	10.1	10.8	11.0	9.8	10.6	10.1	10.8	11.0			
	3H	12.0	12.8	12.3	13.0	13.2	12.0	12.8	12.3	13.0	13.2			
	4H	13.0	13.6	13.3	13.9	14.2	13.0	13.6	13.3	13.9	14.2			
	6H	13.8	14.4	14.1	14.7	15.0	13.8	14.4	14.1	14.7	15.0			
	8H	14.1	14.7	14.4	15.0	15.3	14.1	14.7	14.4	15.0	15.3			
4H	12H	14.4	14.9	14.7	15.2	15.5	14.4	14.9	14.7	15.2	15.5			
	2H	10.6	11.2	10.9	11.5	11.7	10.6	11.2	10.9	11.5	11.7			
	3H	13.0	13.6	13.4	13.9	14.2	13.0	13.6	13.4	13.9	14.2			
	4H	14.1	14.6	14.5	14.9	15.3	14.1	14.6	14.5	14.9	15.3			
	6H	15.0	15.4	15.4	15.8	16.2	15.0	15.4	15.4	15.8	16.2			
8H	8H	15.4	15.8	15.8	16.2	16.6	15.4	15.8	15.8	16.2	16.6			
	12H	15.8	16.1	16.2	16.5	16.9	15.8	16.1	16.2	16.5	16.9			
	4H	14.5	14.9	14.9	15.3	15.7	14.5	14.9	14.9	15.3	15.7			
	6H	15.6	15.9	16.1	16.3	16.8	15.6	15.9	16.1	16.3	16.8			
	8H	16.1	16.4	16.6	16.8	17.3	16.1	16.4	16.6	16.8	17.3			
12H	12H	16.6	16.8	17.1	17.3	17.7	16.6	16.8	17.1	17.3	17.7			
	4H	14.6	14.9	15.0	15.3	15.7	14.6	14.9	15.0	15.3	15.7			
	6H	15.7	16.0	16.2	16.4	16.9	15.7	16.0	16.2	16.4	16.9			
8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5				
Variation of the observer position for the luminaires distances S														
S = 1.0H		+2.7 / -2.0					+2.7 / -2.0							
S = 1.5H		+4.9 / -2.2					+4.9 / -2.2							
S = 2.0H		+6.8 / -2.5					+6.8 / -2.5							
Standard table		BK02					BK02							
Correction Summand		-1.1					-1.1							
Corrected Glare Indices referring to 960lm Total Luminous Flux														

Vivid Model Colour Temperature	2700K	3000K	3500K	4000K	Light Pink
 Reading			●	●	
 Fruits & Vegetables		●	●		
 Bakery	●				
 Retail		●	●		
 Cosmetics			●	●	
 Meat					●
 Fish				●	
 Seafood				●	●

## High Chromatic LED

For commercial product showcasing.

Arkoslight offers, in some of its products, the possibility to incorporate a special LED designed to enhance the visual presentation of goods and products for commercial purposes.

This high-chromaticity LED is selected to highlight tones that encourage a positive psychological perception of the illuminated object.

The light source provides a more attractive and intense colour palette than a conventional LED. This is achieved through a specific LED configuration under a "special saturation parameter," allowing colours and textures to appear more vivid within the visible spectrum.

The diode and its phosphor coating are carefully selected for each application.



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## Instrucciones para el final de vida y la eliminación de los componentes:

### Instructions on end-of-life and component disposal:

### Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

### Istruzioni per il fine vita e lo smaltimento dei componenti:

### Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato  
Cut the power supply to the luminaire  
Couper l'alimentation du luminaire  
Interrompere l'alimentazione dell'apparecchio  
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
Remove light source(s) for disposal  
Retirer la (les) source(s) lumineuse(s) pour l'élimination  
Rimuovere la/le sorgente/e di luce per lo smaltimento  
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
Remove the battery for decommissioning  
Retirer la batterie pour sa mise au rebut  
Rimuovere la batteria per la dismissione  
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
Remove control gear for disposal  
Retirer le dispositif de commande pour l'élimination  
Rimuovere l'alimentatore per lo smaltimento  
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE  
Send the materials to a WEEE collection centre  
Envoyer les matériaux dans une déchetterie DEEE  
Inviare i materiali ad un centro di raccolta RAEE  
Die Materialien in einem WEEE-Zentrum entsorgen

