




Dimensions



Accessories



ADD-ON BEZEL EXCLUDED.
NOT COMPATIBLE.

Awards



reddot design award
winner 2015



Name	SWAP S RT 2012 5W 3500K G
Reference	A4121113G
Color	Gold
RAL	1036
Category	CEILING RECESSED

PRODUCT

Type	LED
Gross luminous flux	705 lm
Colour temperature	3500 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	5 W
Current	150 mA
Efficacy	141 lm/W
LED lifespan	L90B10 >55.000h
Energy efficiency class	E

LIGHT SOURCE

Lighting efficiency	72%
Light beam angle	36°

LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Included - Fast Connect
Power values of the system	5,83 W
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	□

LIGHTING FIXTURE | ELECTRICAL DATA


Sealing	IP65
Impact resistance	IK07
Recess measurements	Ø62 mm
Weight	200 g
Packaged weight	233,5 g
Packaging dimensions	94 x 88 x 93 mm
Units per package	1
Materials	Aluminium / Polycarbonate
Compatible avec la norme française RT2012 & BBC	Oui. Recouvrable d'isolant déroulé.

OTHER DATA



Swap is a ceiling recessed LED spotlight whose main features are its minimalist aspect, its perfect integration into the ceiling, and considerable visual comfort, thanks to the small reflector that is set back with respect to the ceiling plane. When it is switched on, its matte finish shade generates an attractive effect, a discrete circle of light. It includes an add-on bezel that can be used optionally to cover larger recess diameters.


Polar diagram

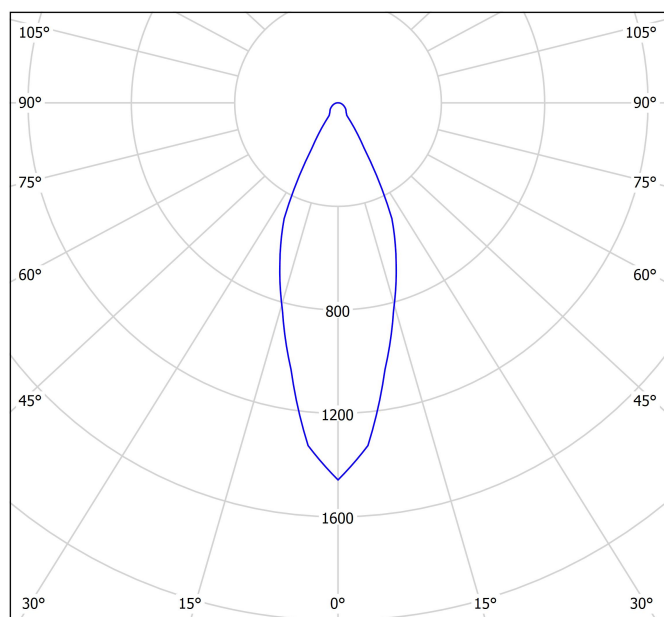

cd/klm
— C0 - C180 — C90 - C270

$\eta = 72\%$

Conical diagram

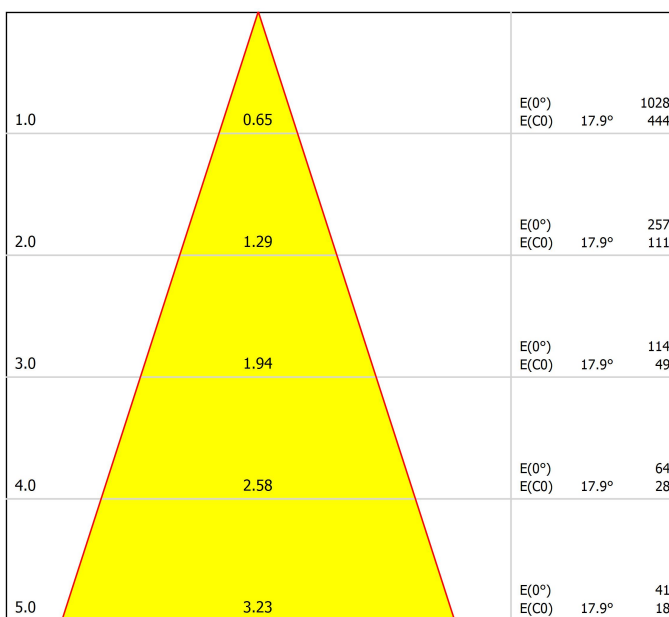

Distance [m] Cone Diameter [m] Illuminance [lx]
— C0 - C180 (Half-value Angle: 35.8°)

UGR

Glare Evaluation According to UGR

Room Size		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis					
X	Y												
2H	2H	17.5	18.3	17.7	18.5	18.7	17.5	18.3	17.7	18.5	18.7	17.5	18.3
	3H	19.4	20.1	19.7	20.4	20.6	19.4	20.1	19.7	20.4	20.6	19.4	20.1
	4H	20.2	20.9	20.5	21.2	21.4	20.2	20.9	20.5	21.2	21.4	20.2	20.9
	6H	20.9	21.6	21.3	21.9	22.2	20.9	21.6	21.3	21.9	22.2	20.9	21.6
	8H	21.3	21.9	21.6	22.2	22.5	21.3	21.9	21.6	22.2	22.5	21.3	21.9
4H	12H	21.6	22.1	21.9	22.5	22.8	21.6	22.1	21.9	22.5	22.8	21.6	22.1
	2H	18.1	18.8	18.4	19.0	19.3	18.1	18.8	18.4	19.0	19.3	18.1	18.8
	3H	20.2	20.8	20.6	21.1	21.5	20.2	20.8	20.6	21.1	21.5	20.2	20.8
	4H	21.2	21.7	21.6	22.1	22.4	21.2	21.7	21.6	22.1	22.4	21.2	21.7
	6H	22.1	22.6	22.5	22.9	23.3	22.1	22.6	22.5	22.9	23.3	22.1	22.6
8H	8H	22.5	22.9	22.9	23.3	23.7	22.5	22.9	22.9	23.3	23.7	22.5	22.9
	12H	22.9	23.3	23.3	23.7	24.1	22.9	23.3	23.3	23.7	24.1	22.9	23.3
	4H	21.6	22.0	22.0	22.4	22.8	21.6	22.0	22.0	22.4	22.8	21.6	22.0
	6H	22.7	23.0	23.1	23.4	23.9	22.7	23.0	23.1	23.4	23.9	22.7	23.0
	8H	23.2	23.5	23.7	23.9	24.4	23.2	23.5	23.7	23.9	24.4	23.2	23.5
12H	12H	23.7	24.0	24.2	24.4	24.9	23.7	24.0	24.2	24.4	24.9	23.7	24.0
	4H	21.7	22.0	22.1	22.4	22.8	21.7	22.0	22.1	22.4	22.8	21.7	22.0
	6H	22.8	23.1	23.3	23.5	24.0	22.8	23.1	23.3	23.5	24.0	22.8	23.1
	8H	23.4	23.6	23.9	24.1	24.6	23.4	23.6	23.9	24.1	24.6	23.4	23.6
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.3 / -0.1						+0.3 / -0.1					
S = 1.5H		+0.6 / -0.4						+0.6 / -0.4					
S = 2.0H		+1.0 / -0.6						+1.0 / -0.6					
Standard table		BK07						BK07					
Correction Summand		6.2						6.2					
Corrected Glare Indices referring to 705lm Total Luminous Flux													



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

Instrucciones para el final de vida y la eliminación de los componentes:

Instructions on end-of-life and component disposal:

Instructions pour la gestion des composants en fin de vie et leur mise au rebut :

Istruzioni per il fine vita e lo smaltimento dei componenti:

Anweisungen zur entsorgung der Leuchtenkomponenten:



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

